



OOS INTERNATIONAL B.V.

SEMI SUBMERSIBLE ACCOMMODATION/ CRANE UNIT



OOS Tiradentes






## OVERVIEW

The SSAVOOSTiradentes is a large, state-of-the-art, multi-functional constructional semi-submersible accommodation unit.

Highly competitive advantages such as a low day rate, high uptime and excellently graded by client's periodical Contractor Performance Evaluation.

The OOS Tiradentes is built to meet the highest accommodation requirements for offshore operations, with a vast open deck space for storage- and maintenance purposes and a DP system with the highest standards for station keeping nearby floating or fixed installations.

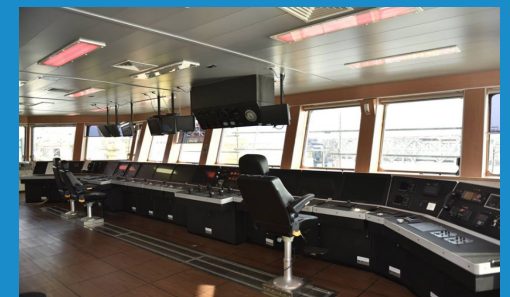

## SEMI-SUBMERSIBLE SPECIFICATIONS

- Hotel capacity is 600 persons on board
- Large open deck space
- Gangway of 38.5m length



# SPECIFICATION

## OOS Tiradentes

### NAME AND BACKGROUND

Delivery date	: 04 Feb. 2018
Builder	: Yantai CIMC Raffles offshore Ltd.
Flag	: Liberia
Port of registry	: Monrovia

### GENERAL

Class	: American Bureau of Shipping (ABS)
Class notation	: ✕A1, Accommodation Service, Column Stabilized Unit, ✕AMS,b✕ACCU, ✕DPS-2, ✕DPS-3, CPS Additional notation: SElev, UWILD, CRC, HAB+(MODU), ENVIRO-OS, HELIDK(SRF)
Length	: 106,45 m
Beam	: 68.90 m
Transit draft	: 8.90 m on the marks / including thrusters (4.96) = 13.86 m
Survival draft	: 15.75 m on the marks / including thrusters (4.96) = 20.71 m
Operational draft	: 17.75 m on the marks / including thrusters (4.96) = 22.71 m
Max operational draft	: 20.00 m on the marks / including thrusters (4.96) = 24.96 m
G.T.	: 38434 tons
Air draft	: Keel – top mast = 70.4 m : 61.5 m @ Transit draft : 50.4 m @ Max Operational draft
Transit Speed	: 10 knots

### MACHINERY AND PROPULSION

Main engines	: MAN 6 x .4400 ekW, 6600V, 60Hz
Emergency generator	: 1 x 1140 ekW, 690V, 60Hz
Fresh water generator	: 3 x 80 t/day
Propulsion	: 6x 3,8MW Thrustmaster Fixed Pitch Azimuth Thrusters, Bottom mounted
Power management System	: Kongsberg Marine

### DECK MACHINERY

Service cranes	: 2 x 60T @ 16,8m
Gangway	: 1x Telescopic Hydraulic Gangway 38,5m, telescoping ± 7,5m
Towing	: 2 x Smit Tow Brackets

### CAPACITIES

Fuel	: 3318 m <sup>3</sup> Fuel Oil Capacity (90%)
Lube oil	: 34m <sup>3</sup>
Fresh water	: 1520m
Deck capacity	: Working Deck Space: Total 2250m <sup>2</sup> ; Main deck area 1300m <sup>2</sup> with 20 ton/m <sup>2</sup>

### HELIDECK

Helideck notation	: D-value 22,8 / 't' value 14,6 (Sikorsky S-92 and S-61N or similar)
Helideck structure	: Steel

### ACCOMODATION

POB	: 600
Single cabins	: 42
Double cabins	: 193
4-man cabins	: 43
Gym	: 2
Client offices	: 7

### SAFETY EQUIPMENT

Lifeboats	: 10 x 120 persons
Life rafts	: 24 x 25 persons
Rescue boat	: 1 x 6 persons



**.O.O.S.**  
international



**CONTACT OOS INTERNATIONAL B.V.**

**The Netherlands**

**Head Office The Netherlands**

OOS-International BV.  
Oostkapelseweg 4  
4353 EH Serooskerke (w)  
P.O. Box 40  
4353 ZG Serooskerke (w)  
chartering@oosinternational.com  
Tel. Office +31 (0) 118 726 200  
KVK/Chamber of Commerce nr 20149791  
Tax Nr. NL8204.64.624.B.01  
The Netherlands

